

UNDERCOVER LED KIT USER MANUAL

CONTENTS

6LED KIT

LIGHTHEAD x 2pcs



GASKET x 2pcs



SCREW x 4pcs

EXTENSION CABLE



FLANGE x 2pcs



FOAM x 2pcs


FLASHER & CABLE




FLANGE MOUNT INSTALLATION (for 6LED kits with Flange option only)

1. Use mounting flange to mark wire and screws holes to drill.
2. Drill marked holes accordingly.
3. Insert lighthouse pigtail into wire hole.
4. Place foam, lighthouse, and flange in line with the mounting holes, and secure with supplied sheet metal screws.

NOTE: Position lighthouse so that LEDs are facing the desired direction.

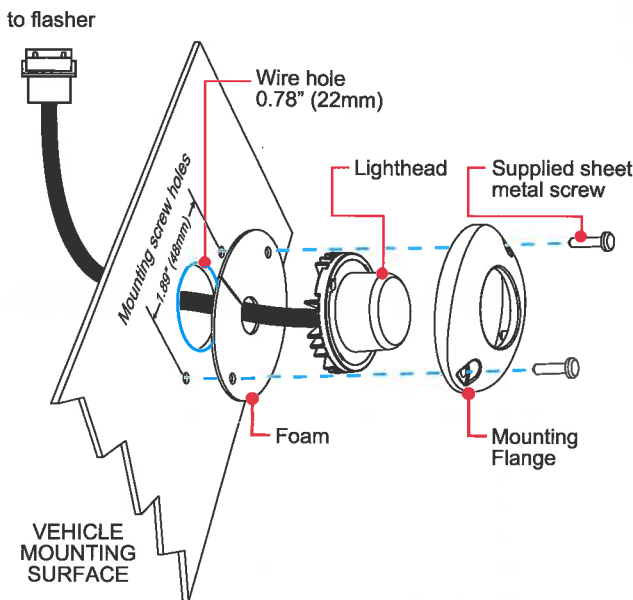

The Flange Mount Option enables surface mounting of lightheads to provide optimum light output to the critical intersection angles.

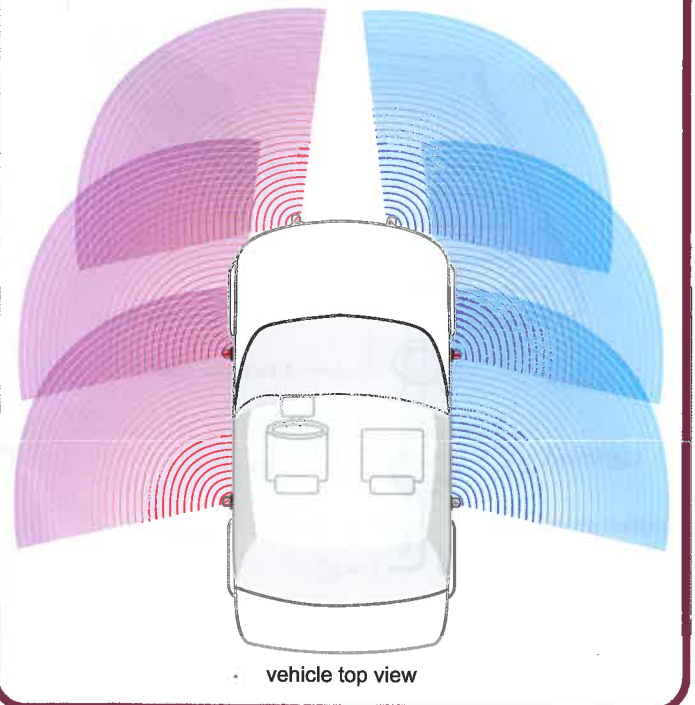

WARNING: Make sure to use the foams when mounting lightheads.

WIRING 2 KITS TOGETHER


In this configuration, different alternating flash patterns can be achieved.

If "split" flash pattern* is selected:
Heads 1&4 will alternate with Heads 2&3.

If "all" flash pattern* is selected:
Heads 1&2 will alternate with Heads 3&4.

*refer to Flash Patterns chart on opposite page.

NOTE: To have Heads 1&3 alternate with 2&4, leave all WHITE wires disconnected and select "split" flash patterns.

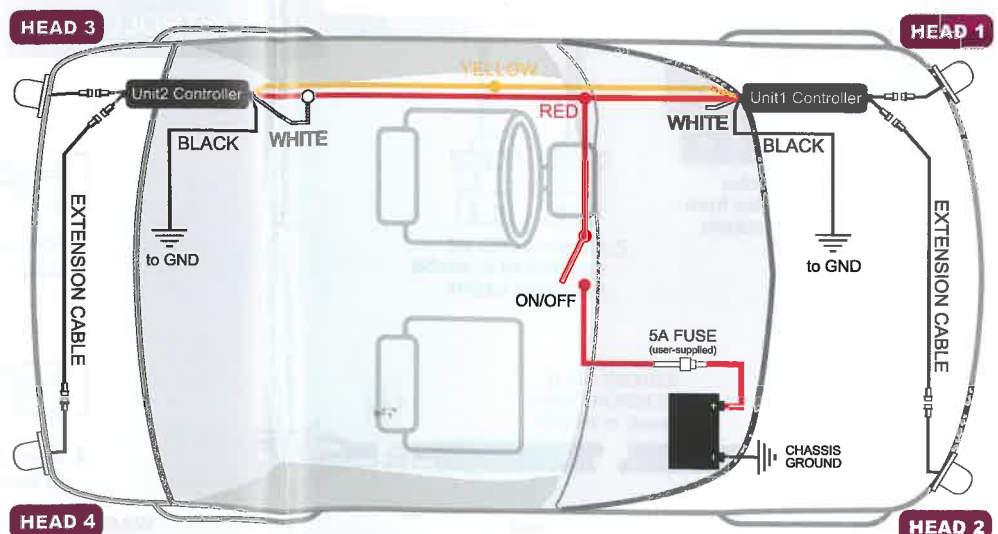

NOTE: Illustration not to scale.